

Nyhavn

sedia/chair


design: Alberto Turolo





L'armonioso innesto di linee della base e dello schienale in legno massello di frassino è perfezionato dall'utilizzo di un sedile imbottito, che ne disegna una seduta estremamente pulita e leggera.

Imballo / Packaging




2 x 1 box
0,30 cbm
12,00 kg


The harmonious lines of the graft base and back in solid ash wood is perfected by the use of a Padded seat, upholstered, which draws a sitting extremely clean and light.

Gambe / Legs

Essenze / Essences

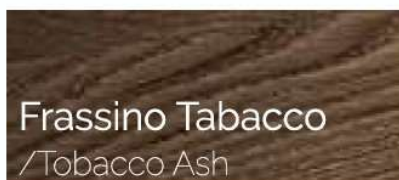

Laccati / Laquered

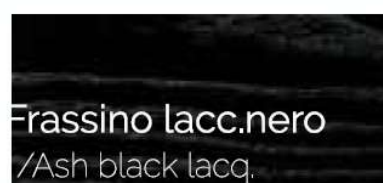

Tessuto Angel/Angel Fabric



Tessuto Caliente / Caliente Fabric



Tessuto / Fabric IRIS

Tessuto per interni
Indoor fabric

itf
Design



IRIS
Crema



IRIS
Biscotto



IRIS
Nociola



IRIS
Tabacco



IRIS
Castoro



IRIS
Fango



IRIS
Limone



IRIS
Salvia



IRIS
Verde bosco



IRIS



IRIS



IRIS




IRIS
Acciaio



IRIS
Navy



IRIS
Glicine

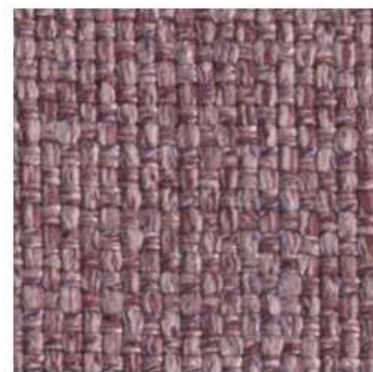

IRIS
Malva



IRIS
Cipria



IRIS
Grigio chiaro



IRIS
Grigio



IRIS
Elefante



IRIS
Antracite



IRIS
Grafite

Tessuto Shore/Shore Fabric


43




LIMA



TOFFEE




GREEN




TRUFA



CREAM



SALMON

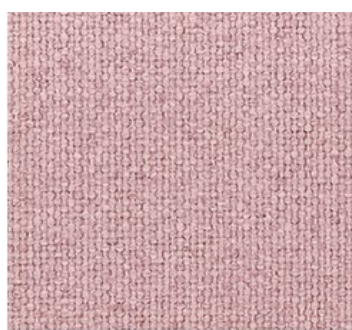


PINK



CAMEL



YELLOW



TEIA



MOKA




CHOCOLATE




RED




SAND



LIGHT GREY



SKY




FOG



ASH



OCEAN



ELEPHANT



ANTHRACITE



BLACK

Tessuto / Fabric

TOBAGO



Tessuto idrorepellente
Water repellant fabric

Composition	100% Polyester
Width	140 cm +/-2%
Weight	430 gr/m2 +/-5%
Category	plain fabric
Usage	 
Treatment	
Care	    



00



01



04



14



24



34



44



54



25



49



23




13



03



08



18



28




38



57



37



47



67



27



17



06



16




26




36




46



56



66



76

TOBAGO

Water Repellent

COMPOSITION ZUSAMMENSETZUNG COMPOSIZIONE TESSUTO		100% POLYESTER 100% POLYESTER 100% POLIESTERE	
WIDTH BREITE ALTEZZA	140 cm +/-2%	WEIGHT GEWICHT PESO	430 gr/m ² +/-5%
TEST	STANDARD	RESULTS WARP/ KETTE/ ORDITO	ERGENIS/RISULTATI WEFT/ SCHUSS/ TRAMA
TENSILE STRENGTH ZUGFESTIGKEIT RESISTENZA ALLA TRAZIONE	EN ISO 13934-1	2208 N	1056 N
TEAR STRENGTH WEITERREISSFESTIGKEIT RESISTENZA ALLA LACERAZIONE	EN ISO 13937-3	215 N	214 N
RESISTANCE TO SEAM SLIPPAGE NAHTSCHIEBEWIDERSTAND RESISTENZA ALLO SCORRIMENTO DELLA CUCITURA	EN ISO 13936-2	1,9 mm	2,7 mm
ABRASION RESISTANCE SCHEUERBESTAENDIGKEIT RESISTENZA ALL'ABRASIONE	EN ISO 12947-1 EN ISO 12947-2	>100.000 REVS /TOUREN/GIRI	
PILLING RESISTANCE PILLBILDUNG RESISTENZA PILLING	EN ISO 12945-2 5.000 REVS./ SCHEUERTOUREN/GIRI	4	
COLOUR FASTNESS TO LIGHT LICHTECHTHEIT RESISTENZA ALLA LUCE	EN ISO 105-B02 Method 2	>5	
COLOUR FASTNESS TO RUBBING REIBECHTHEIT RESISTENZA COLORE ALL'ABRASIONE	EN ISO 105-X12	DRY TROCKEN/ SECCO	WET/ NASS/UMIDO
		3-4	4
CONTAIN OF AZO DYES AZOFARBSTOFFE CONTENUTO DI COLORANTI AZOICI	DIN EN 14362-1 DIN EN 14362-3	NOT DETECTABLE NICHT NACHWEISBAR NON RILEVABILE	
ALLERGY CAUSING DYES ALLERGISIERENDE FARBSTOFFE CONTENUTO DI COLORANTI ALLERGENICI	DIN 54231	NOT DETECTABLE NICHT NACHWEISBAR NON RILEVABILE	
FIRE RETARDANT BRENNVERHALTEN IGNIFUGO	DIN EN 1021-1 -without soaking- BS 5852 Source 0 -without soaking-	PASSED UEBERSTANDEN SUPERATO	
FABRIC PROTECTION STOFFSCHUTZ PROTEZIONE TESSUTO	WATER REPELLENT WASSERABWEISEND IDROREPELENTE		

COLOUR DIFFERENCES BETWEEN DYING LOTS ARE POSSIBLE

FARBNIANSSEN SIND MOEGLICH

TRA I VARI LOTTI POSSONO VERIFICARSI DELLE VARIAZIONI NEL COLORE.



Tessuto / Fabric

URBAN



Tessuto intrecciato Plated fabric



**GOOD FOR
BABIES**



**GOOD FOR
PLANET**



WATER BLOCKED



REACH CONFORM



NON-FLAMMABLE

FABRIC TYPE | GEWEBE ART

plaited fabric | Geflechtstoff

WEIGHT | GEWICHT

450 g/m²

COMPOSITION | ZUSAMMENSETZUNG

100% PES

WIDTH OF ROLL | BREITE

140 cm +/- 2 cm

CERTIFICATE | ZULASSUNG

TEST SPECIFICATION
PRUFVERFAHREN

TEST RESULT
WERT

CATEGORY
KATEGORIE

TENSILE STRENGTH
HOCHZUGFESTIGKEIT

DIN EN ISO 13934-1

warp: 1989 N (39,1%)
weft: 635 N (40,0%)

A/A

TEAR GROWTH
RESISTANCE | REISSFESTIGKEIT

DIN EN ISO 13937-3

warp: 116,5 N
weft: 64,5 N

A/A

RESISTANCE TO SEAM
SLIPPAGE | VERSCHIEBBARKEIT DER FÄDEN IN DER NAHT

DIN EN ISO 13936-2
180 N load

warp: 2,3 mm
weft: 3,0 mm

A/A

ABRASION RESISTANCE
MARTINDALE METHODE

DIN EN ISO 12947-1
DIN EN ISO 12947-2

Yarn breakage: 83 000 cycles

A

PILLING TEST | ANFÄLLIGKEIT
FÜR FUSSELN

DIN EN ISO 12945-2
2000 cycles

4-5

A

COLOUR
FASTNESS TO LIGHT | LICHTBESTÄNDIGKEIT

DIN EN ISO 105-B02
Process 3

4

C

COLOUR FASTNESS
TO RUBBING | REIBUNGSBESTÄNDIGKEIT

DIN EN ISO 105-X12

dry | trocken: 5
wet | nass: 5

A/A

IGNITABILITY | BRANDVERHALTEN

BS 5852 Source 0
TB 117-2013

passed | bestanden

REACH

passed | bestanden



urban_1



urban_2



urban_3



urban_4



urban_5



urban_6



urban_7



urban_8



urban_9



urban_10



urban_11



urban_12



urban_13



urban_14